



# PETRACARBON

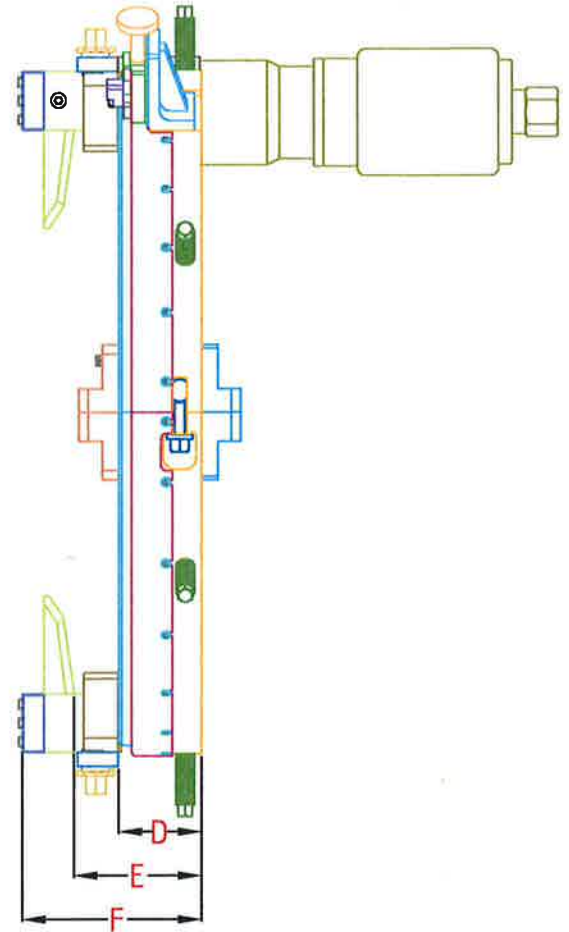

**BOLTITE® Split Frame Pipe Cutter**

## External Mount, Split Frame Pipe Cutter

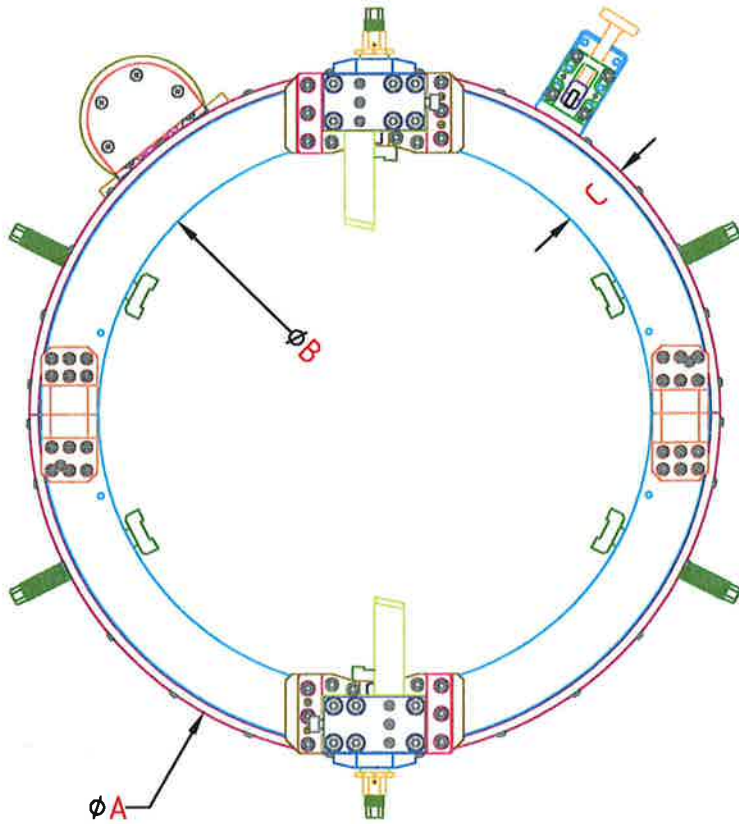


SPECIFICATIONS	S/N	MODEL	A	B	C	D	E	F
	01	BOLTITE Ext 2.4	245 mm	127 mm	59 mm	71 mm	109 mm	163 mm
	02	BOLTITE Ext 4.6	298 mm	180 mm	59 mm	71 mm	109 mm	163 mm
	03	BOLTITE Ext 8.12	454 mm	336 mm	59 mm	71 mm	109 mm	163 mm
	04	BOLTITE Ext 14.18	590 mm	472 mm	59 mm	71 mm	109 mm	163 mm
	05	BOLTITE Ext 18.24	760 mm	630 mm	65 mm	79 mm	117 mm	171 mm
	06	BOLTITE Ext 26.32	940 mm	810 mm	65 mm	79 mm	117 mm	171 mm
	07	BOLTITE Ext 26.32 MD	980 mm	830 mm	75 mm	97 mm	135 mm	217 mm
	08	BOLTITE Ext 30.36	1065 mm	935 mm	65 mm	79 mm	117 mm	171 mm
	09	BOLTITE Ext 30.36 HD	1143 mm	935 mm	104 mm	127 mm	165 mm	254 mm
	10	BOLTITE Ext 36.39	1140 mm	1010 mm	65 mm	79 mm	117 mm	171 mm
	11	BOLTITE Ext 38.46 MD	1196 mm	1346 mm	75 mm	97 mm	135 mm	217 mm
	12	BOLTITE Ext 38.44 HD	1404 mm	1196 mm	104 mm	127 mm	165 mm	254 mm
	13	BOLTITE Ext 48.52 HD	1554 mm	1350 mm	104 mm	127 mm	165 mm	254 mm
	14	BOLTITE Ext 48.54 HD	1600 mm	1396 mm	104 mm	127 mm	165 mm	254 mm
Cutter Travel : 60mm      Air Motor : 3.5HP      Air Flow : 90CFM								
Optional : Hydraulic Drive [10HP]								





- **Low Profile Split-Frame Design** - Minimum operating clearance needed
- **Robust and Durable** - Designed for heavy-duty applications
- **Quality and Safe** - Non-flameable, suitable under any hazardous conditions
- **Reliable** - Unique bearing system improves machine life
- **Quick and Easy** - Fast setup and operation with minimum time and effort
- **Cutting capability** - Severing (parting off), beveling, facing and boring
- **Cutting ranges from 2" to 44" OD**

## **BOLTITE** Cold Pipe Cutter

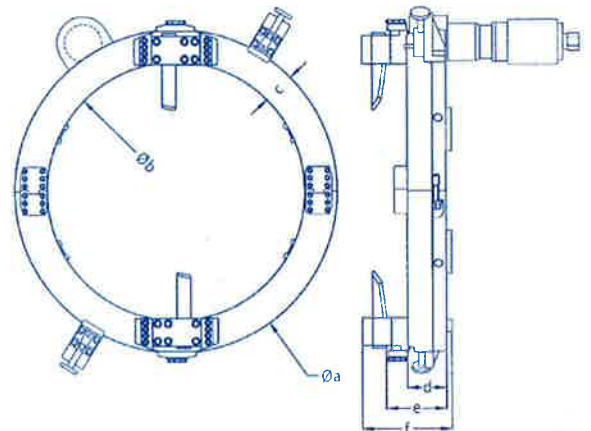

### Technical Specification

MODEL	CUTTING RANGE		TOOL DIMENSIONS (mm)						Weight kg
	inch	mm	a	b	c	d	e	f	
Boltite Ext 2.4	2" to 4"	50 mm – 102 mm	245	127	59	71	109	163	15
Boltite Ext 4.6	4" to 6"	102 mm – 152 mm	298	180	59	71	109	163	22
Boltite Ext 8.12	8" to 12"	203 mm – 305 mm	454	336	59	71	109	163	35
Boltite Ext 14.18	14" to 18"	356 mm – 457 mm	590	472	59	71	109	163	48
Boltite Ext 18.24	18" to 24"	457 mm – 610 mm	760	630	65	79	117	171	81
Boltite Ext 26.32	26" to 32"	660 mm – 812 mm	940	826	65	79	117	171	92
Boltite Ext 30.36	30" to 36"	762 mm – 914 mm	1065	935	65	79	117	217	112
Boltite Ext 26.32 MD	26" to 32"	660 mm – 812 mm	980	830	75	97	135	217	108
Boltite Ext 30.36 HD	30" to 36"	762 mm – 914 mm	1143	935	104	127	165	254	340
Boltite Ext 38.44 HD	38" to 44"	965 mm – 1118 mm	1404	1196	104	127	165	254	355

Cutter Travel: 60mm / Tool operated by 3.5hp air-motor (90cfm) or 10hp hydraulic motor



# BOLTITE® Split Frame Pipe

